EXHIBIT C – LANDSCAPING
(page 1 of 2)

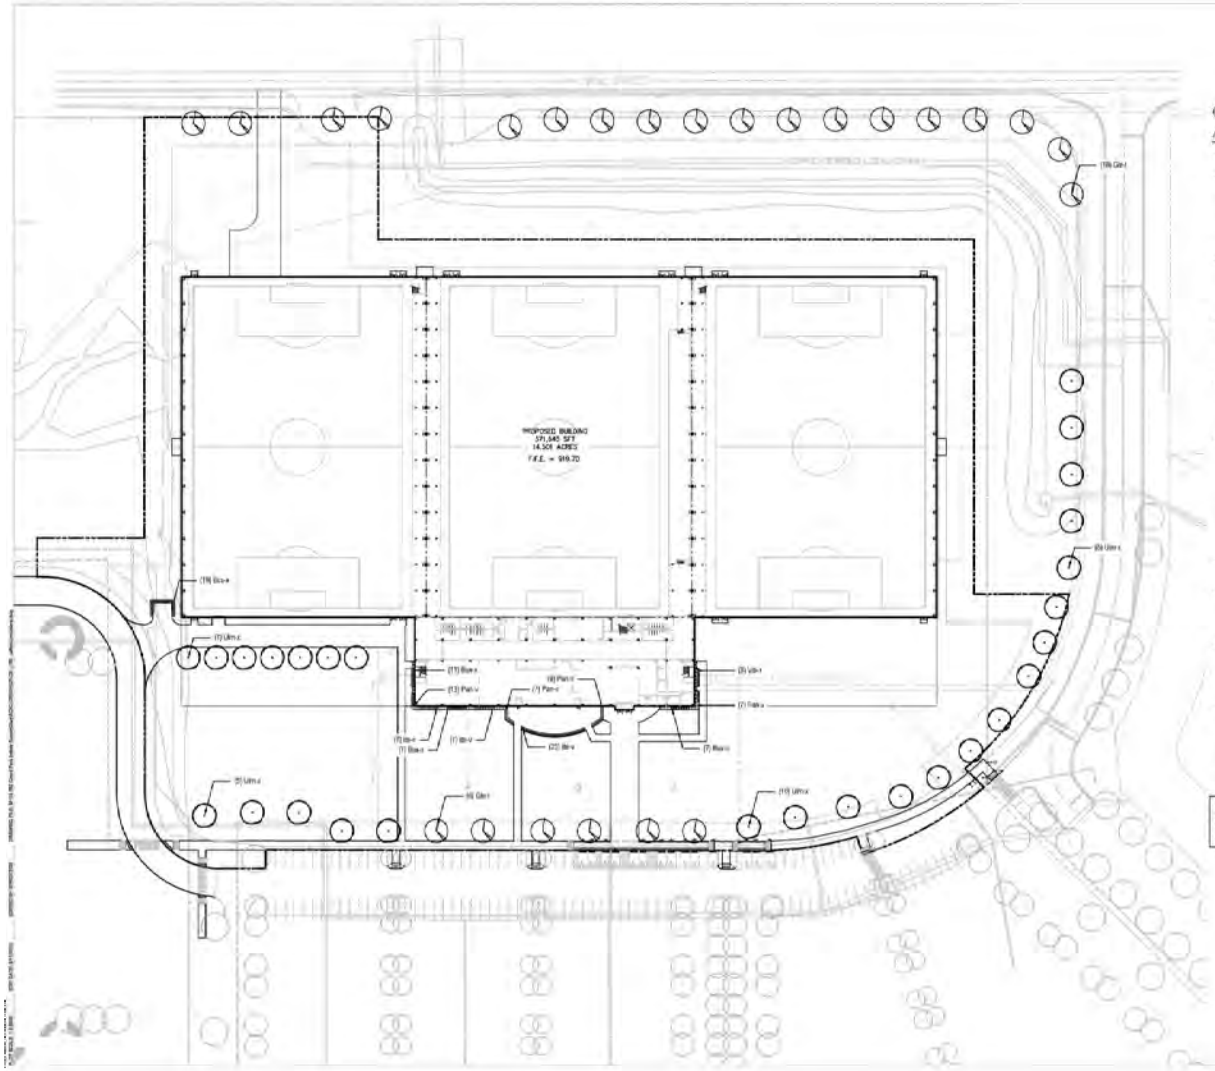

SCALE: 1"=50'

GENERAL LANDSCAPE AND PLANTING NOTES

1. Plant material to be installed and maintained by a qualified and experienced landscape installer.
2. All materials are subject to the approval of the Landscape Architect and Owner at any time. Landscape Architect to inspect all plant locations and plant bed conditions prior to installation. Stake all plant locations for review and approval by the Landscape Architect before planting. On-site adjustments may be required. Plants are to be freshly dug. Transporting of plants shall be done in a manner as to not deface the natural shape, compromise the health, or alter the characteristics of plant materials.
3. Rootballs shall meet or exceed size standards as set forth in "American Standards for Nursery Stock". MAIN LEADERS OF ALL TREES SHALL REMAIN INTACT. Remove from the site any plant material that dies (shall be deemed within five (5) days after planting). Replace immediately with approved, specified material.
4. Plant counts indicated on drawings are for Landscape Architect's use only. Contractor shall make own plant quantity takeoffs using drawings, specifications, and plant schedule requirements (i.e., spacing) unless otherwise directed by Landscape Architect. Contractor to verify bed measurements and install appropriate quantities as governed by plant spacing per schedule.
5. All plant beds shall receive 2" minimum of genuine shredded hardwood bark mulch (unless otherwise noted). Apply pre-emergent herbicide as directed by the manufacturer prior to installing mulch. Stake all beds disturbed by construction activities that are not otherwise noted to receive pavement, planting bed, or other treatment.
6. The Contractor shall install and/or amend topsoil in all proposed bed areas to meet ASTM D5268 standards. Landscaper shall verify depth and quality of topsoil prior to plant installation. A minimum of 4" of topsoil is required for lawn areas, 12" for plant beds. Topsoil sources shall include the reuse of surface soil stockpiled on site, clean of roots, plants, sod, stones, clay lumps, and other extraneous or foreign materials larger than 1". Supplement with imported topsoil from offsite sources when quantities are insufficient. Do not obtain supplemental topsoil from agricultural land, bogs, or marshes. Inorganic amendments, organic amendments, and fertilizers shall be used to amend topsoil as needed for long-term plant health.
7. Verify all utility locations in the field prior to beginning work. Repair all damaged utilities to satisfaction of the Owner and Operating Authority at no additional cost.
8. Install all plant material in accordance with all local codes and ordinances. Coordinate with the Owner to obtain any required permits necessary to complete work. All workmanship and materials shall be guaranteed by the Contractor for a period of one (1) calendar year after Final Acceptance.
9. Maintain all plant material for a three (3) month period from date of Substantial Completion. Maintenance shall include pruning, cultivating, watering, weeding, fertilizing, replacing plant stakes, spraying for disease and insects, and replacing tree wrappings. Recommended long-term maintenance procedures shall be provided to the Owner before expiration of this period.
10. Satisfactory Seeded Lawn: At end of maintenance period, a healthy, uniform, close stand of grass has been established free of weeds and surface irregularities, with coverage exceeding 90 percent over any 10 sq. ft. (0.92 sq. m) and bare spots not exceeding 3-by-3 inches (Reestablish lawns that do not comply with requirements and continue maintenance until lawns are fully satisfactory to the Owner.

NOTE: All HVAC and dumpster enclosures will be screened per the requirements of the Zoning Ordinance.

STRUCTUREPOINT

CONTEXT landscape architecture

GRAND PARK INDOOR SPORTS ARENA

WESTFIELD, IN

EXPIRES 12/31/2015

CERTIFIED BY

ISSUANCE INDEX

DATE: 07/16/2014

PROJECT PHASE: DESIGN DEVELOPMENT

REVISION SCHEDULE		
NO.	DESCRIPTION	DATE

Project Number 2014.01025

LANDSCAPE PLAN

L100

EXHIBIT C – LANDSCAPING
(page 2 of 2)

PLANT SCHEDULE

Symbol	Botanical Name	Common Name	Size	Container	Notes
TREES					
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
SHRUBS					
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
GROUNDCOVERS, PERENNIALS, AND GRASSES					
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]



MOW STRIP
Not to Scale



SHRUB PLANTING
Not to Scale



STEEL EDGE
Not to Scale



TREE PLANTING
Not to Scale

STRUCTUREPOINT

CONTEXT

GRAND PARK INDOOR SPORTS ARENA

WESTFIELD, IN

CERTIFIED BY

ISSUANCE INDEX
DATE:
07/16/2014
PROJECT PHASE:
DESIGN DEVELOPMENT

REVISION SCHEDULE		
NO.	DESCRIPTION	DATE

Project Number: 2014.0103

LANDSCAPE DETAILS

L101