INTERIOR PARKING LOT PLANTING TABLE

10% OF VEHICULAR USE AREAS SHALL BE LANDSCAPED AREA, PARKING LOT ISLANDS SHALL INCLUDE AT LEAST 1 TREE AND 4 SHRUBS.

| SYMBOL | PARKING SPACES | LANDSCAPED AREA NEEDED | LANDSCAPED AREA PROVIDED | TREES NEEDED | TREES PROVIDED | SHRUBS NEEDED | SHRUBS PROVIDED |
|---|---|---|---|---|---|---|---|
| | 78 | 2,340 SF | 2,911 SF | 5 | 5 | 24 | 24 |

PERIMETER PARKING LOT PLANTING TABLE

MIN. SYMBOL, MIN. 1 TREE/30 LFT, 1 SHRUB/3 LFT

| SYMBOL | TOTAL LENGTH | TREES NEEDED | TREES PROVIDED | SHRUBS NEEDED | SHRUBS PROVIDED |
|---|---|---|---|---|---|
| | 474' | 15.8 | 8 | 158 | 100 |

ROAD FRONTAGE PLANTING TABLE

MIN. 1 SHADE TREE/ 40'

| SYMBOL | TOTAL LENGTH | SHADE TREES NEEDED | SHADE TREES ORNAMENTAL PROVIDED |
|---|---|---|---|
| | 703' | 17.7 | 8 |

BUFFER YARD PLANTING TABLE

MIN. 1 EVERGREEN TREE / 30 LFT, 3 EVERGREEN SHRUBS/ 30 LFT

| SYMBOL | TOTAL LENGTH | EVERGREEN TREES NEEDED | EVERGREEN TREES PROVIDED | EVERGREEN SHRUBS NEEDED | EVERGREEN SHRUBS PROVIDED |
|---|---|---|---|---|---|
| | 278 | 9.2 | 16 | 46.0 | 31 |

ON-SITE PLANTING TABLE

MIN. 10 SHADE TREES/ ACRE, 10 ORNAMENTAL TREES/ ACRE, 25 SHRUBS/ ACRE

| TOTAL AREA | SHADE/ EVERGREEN TREES NEEDED | SHADE TREES PROVIDED IN ROAD FRONTAGE PLANTING | ORNAMENTAL/ EVERGREEN TREES NEEDED | EVERGREEN TREES PROVIDED IN BUFFER YARD PLANTING | SHRUBS NEEDED | SHRUBS PROVIDED |
|---|---|---|---|---|---|---|
| 1.334 ACRE | 13.3 | 18 | 13.3 | 16 | 33.35 | 39 |

| SYMBOL | DESCRIPTION | 4 AR (BP) | PLANT QUANTITY<br>PLANT TYPE<br>REQ. LOCATION |
|---|---|---|---|
| (IP) | INTERIOR PARKING LOT REQUIREMENTS | | |
| (PP) | PERIMETER PARKING LOT REQUIREMENTS | | |
| (RF) | ROAD FRONTAGE REQUIREMENTS | | |
| (BY) | BUFFER YARD REQUIREMENTS | | |
| (P) | FOUNDATION PLANTS | | |

02 TYPICAL AC UNIT SCREENING

L1.01 1/4"=1'-0"

OPEN SPACE: 39.4%
PAKRING SPACE: 56

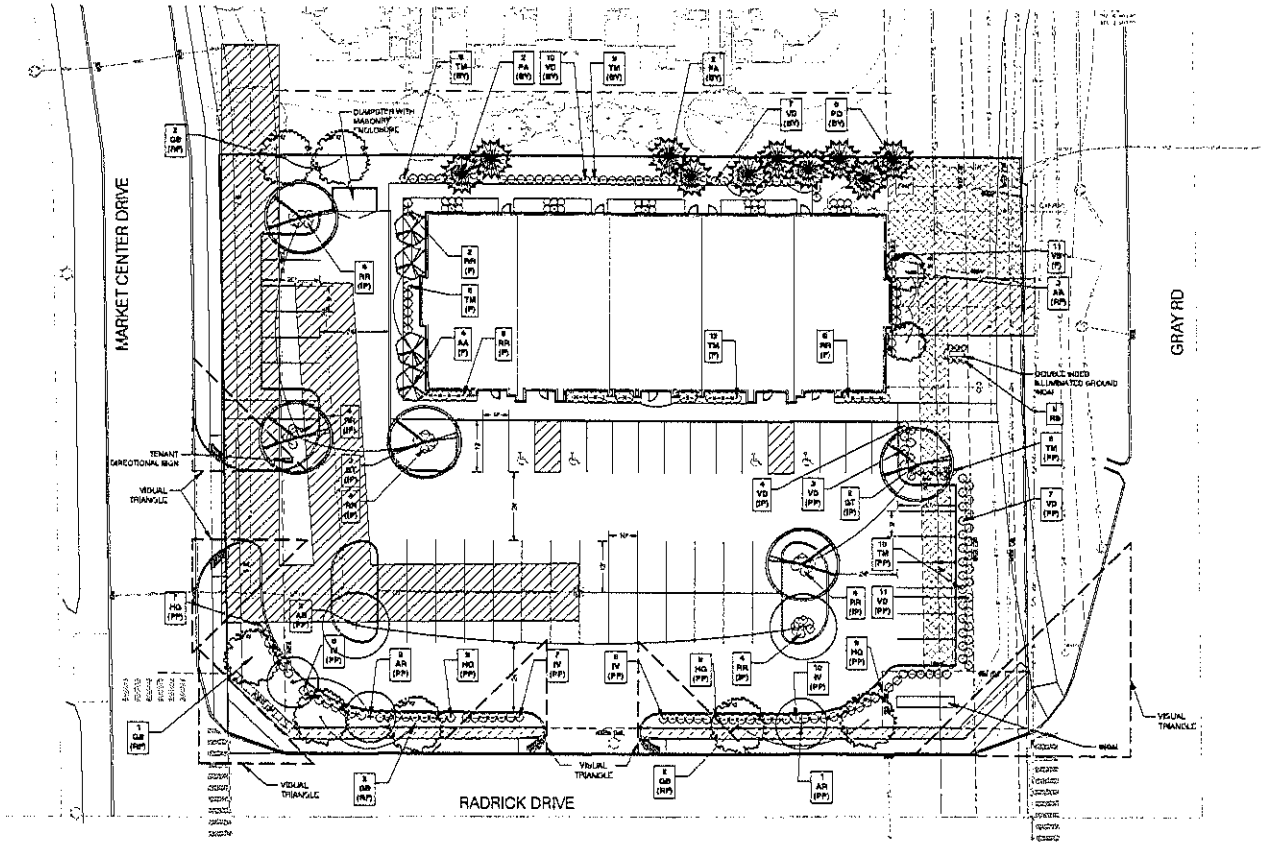


01 SITE LANDSCAPE PLAN

L1.01 1"=20'-0"

PLANT SCHEDULE

| KEY | QTY. | PLANT NAME | SIZE | SPACING | NOTES |
|---|---|---|---|---|---|
| TREES | | | | | |
| AA | 7 | AMELANCHIER x GRANDIFLORA 'AUTUMN BRILLIANCE' EASTERN REDBUD | 1 1/2" CAL. | AS SHOWN | FULL, UNSHEARED |
| AR | 8 | ACER RUBRUM 'ARMSTRONG' ARMSTRONG RED MAPLE | 2 1/2" CAL. | AS SHOWN | FULL, STRONG STRAIGHT TRUNK |
| AS | 5 | ACER SACCHARUM 'GREEN MOUNTAIN' GREEN MOUNTAIN MAPLE | 2 1/2" CAL. | AS SHOWN | FULL, UNSHEARED |
| BU | 35 | BUXUS x 'GREEN VELVET' GREEN VELVET BOXWOOD | NO. 3 CONT. | AS SHOWN | FULL, MATCH, UNSHEARED |
| GB | 9 | GINKGO BILOBA 'PRINCETON SENTRY' PRINCETON SENTRY GINKGO | 2 1/2" CAL. | AS SHOWN | FULL, STRONG STRAIGHT TRUNK |
| GT | 4 | GLEDITSIA TRIACANTHOS L. 'SKYLINE' SKYLINE HONEYLOCUST | 2 1/2" CAL. | AS SHOWN | FULL, STRONG STRAIGHT TRUNK |
| HG | 35 | HYDRANGEA M 'ENDLESS SUMMER' TWIST-N-SHOUT TWIST-N-SHOUT HYDRANGEA | 24" TALL | 36" O.C. | |
| IV | 31 | ITEA VIRGINICA VIRGINIA SWEETSPIRE | 24" TALL | 36" O.C. | |
| PA | 4 | PICEA ABIES NORWAY SPRUCE | 8'-10' HT. | AS SHOWN | FULL TO GROUND, MATCHED UNSHEARED, STRAIGHT TRUNK |
| PD | 8 | PICEA OMORIKA SERBIAN SPRUCE | 8'-10' HT. | AS SHOWN | FULL TO GROUND, MATCHED UNSHEARED, STRAIGHT TRUNK |
| RR | 32 | ROSA 'MEITRIOMINE' PINK DOUBLE KNOCK OUT ROSE | 18-24" HT. | 36" O.C. | FULL TO GROUND, UNSHEARED |
| RS | 9 | RUDBECKIA SUBTOMENTOSA SWEET BLACK-EYED SUSAN | 1 GAL. | 24" O.C. | FULL TO GROUND, MATCHED |
| TM | 47 | TAXUS x MEDIA 'DENSIFORMIS' DENSE SPREADING YEW | 18-24" HT. | 30" O.C. | FULL TO GROUND, UNSHEARED |
| VD | 53 | VIBURNUM DENTATUM 'BLUE MUFFIN' BLUE MUFFIN VIBURNUM | 18-24" HT. | 30" O.C. | FULL TO GROUND, UNSHEARED |

KEVIN K. PARSONS & ASSOCIATES, INC.
landscape architecture land planning urban design
212 West 10th Street • Suite A-200
Indianapolis, Indiana 46202
317-955-0105 • Fax 317-955-0405

CERTIFICATION

GILMORE

WESTFIELD, INDIANA

LANDSCAPE PLAN

PROJECT: KPA-16005
DRAWING: YL
CHECKED: KKP/JML
SCALE: AS SHOWN
ISSUE DATE: 03/03/2016
REVISION: 03/31/2016
04/18/2016

SITE LANDSCAPE PLAN

L1.01

**EXHIBIT "C"**