

## GENERAL LANDSCAPE AND PLANTING NOTES

- Plant material to be installed and maintained by a qualified and experienced landscape installer.
- All materials are subject to the approval of the Landscape Architect and Owner at any time. Landscape Architect to inspect all plant locations and plant bed conditions prior to installation. Stake all plant locations for review and approval by the Landscape Architect before planting. On-site adjustments may be required. Plants are to be freshly dug. Transporting of plants shall be done in a manner as to not destroy the natural shape, compromise the health, or alter the characteristics of plant materials.
- Rootballs shall meet or exceed size standards as set forth in 'American Standards for Nursery Stock'. MAIN LEADERS OF ALL TREES SHALL REMAIN INTACT. Remove from the site any plant material that turns brown or defoliates within five (5) days after planting. Replace immediately with approved, specified material.
- Plant counts indicated on drawings are for Landscape Architect's use only. Contractor shall make own plant quantity takeoffs using drawings, specifications, and plant schedule requirements (i.e., spacing), unless otherwise directed by Landscape Architect. Contractor to verify bed measurements and install appropriate quantities as governed by plant spacing per schedule.
- All plant beds shall receive 3" minimum of genuine shredded hardwood bark mulch (unless otherwise noted). Apply pre-emergent herbicide as directed by the manufacturer prior to installing mulch. Seed all areas disturbed by construction activities that are not otherwise noted to receive pavement, planting bed, or other treatment.
- The Contractor shall install and/or amend topsoil in all proposed bed areas to meet ASTM D5268 standards. Landscaper shall verify depth and quality of topsoil prior to plant installation. A minimum of 4" of topsoil is required for lawn areas; 12" for plant beds. Topsoil sources shall include the reuse of surface soil stockpiled on site, clean of roots, plants, sod, stones, clay lumps, and other extraneous or foreign materials larger than 1". Supplement with imported topsoil from off-site sources when quantities are insufficient. Do not obtain supplemental topsoil from agricultural land, bogs, or marshes. Inorganic amendments, organic amendments, and fertilizers shall be used to amend topsoil as needed for long-term plant health.
- Verify all utility locations in the field prior to beginning work. Repair all damaged utilities to satisfaction of the Owner and Operating Authority at no additional cost.
- Install all plant material in accordance with all local codes and ordinances. Coordinate with the Owner to obtain any required permits necessary to complete work. All workmanship and materials shall be guaranteed by the Contractor for a period of one (1) calendar year after Final Acceptance.
- Maintain all plant material for a three (3) month period from date of Substantial Completion. Maintenance shall include pruning, cultivating, watering, weeding, fertilizing, restoring plant saucers, spraying for disease and insects, and replacing tree wrappings. Recommended long-term maintenance procedures shall be provided to the Owner before expiration of this period.
- Satisfactory Seeded Lawn: At end of maintenance period, a healthy, uniform, close stand of grass has been established, free of weeds and surface irregularities, with coverage exceeding 90 percent over any 10 sq. ft. (0.92 sq. m) and bare spots not exceeding 3 by 3 inches. Reestablish lawns that do not comply with requirements and continue maintenance until lawns are fully satisfactory to the Owner.




7260 Shadeland Station | Indianapolis, Indiana 46256  
TEL 317.547.5580 | FAX 317.543.0270  
www.structurepoint.com



12 S. Main Street, Suite 200 | Fortville, IN 46040  
tel 317.485.6800 | www.context-design.com

### GRAND PARK INDOOR SPORTS ARENA

WESTFIELD, IN



CERTIFIED BY

ISSUANCE INDEX	
DATE:	07/16/2014
PROJECT PHASE:	DESIGN DEVELOPMENT

REVISION SCHEDULE		
NO.	DESCRIPTION	DATE


Project Number 2014.01025

### LANDSCAPE PLAN


L100

PLOT DATE: 7/16/2014 12:38 PM  
 PLOT SCALE: 1/2"=48'  
 DRAWING FILE: M:\14762 Grand Park Indoor Sports\DWG\ACAD-2014\01025\_CEL\_L100.dwg  
 EDITED BY: KPROCTOR  
 EDIT DATE: 7/16/2014


PLANT SCHEDULE					
Symbol	Botanical Name	Common Name	Size	Container	Notes
CANOPY TREES					
Gle-t	Gleditsia triacanthos inermis 'Shademaster'	Shademaster Honeylocust	1.5" cal.	B&B	symmetrical, matched, strong central leader
Ulm-x	Ulmus x 'Princeton'	Princeton Elm	1.5" cal.	B&B	symmetrical, matched, strong central leader
SHRUBS					
Bux-x	Buxus x koreana 'Green Mountain'	Green Mountain Boxwood	24" ht.	container	space @ 3'-0" o.c.
Ite-v	Itea virginica 'Henry's Garnet'	Henry's Garnet Sweetspire	24" ht.	container	space @ 3'-0" o.c., allow to mass
Vib-x	Viburnum x juddii	Judd Viburnum	24" ht.	container	space @ 4'-0" o.c., allow to mass
GROUNDCOVERS, PERENNIALS AND GRASSES					
Pan-v	Panicum virgatum 'Cloud Nine'	Cloud Nine Switch Grass	24" ht., min.	pot	space @ 3'-0" o.c.

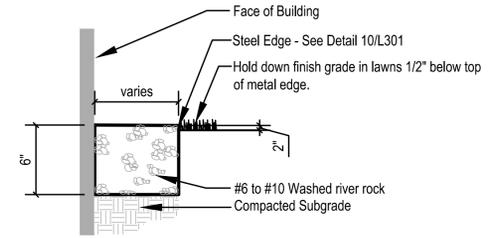


**MOW STRIP**  
Not to Scale

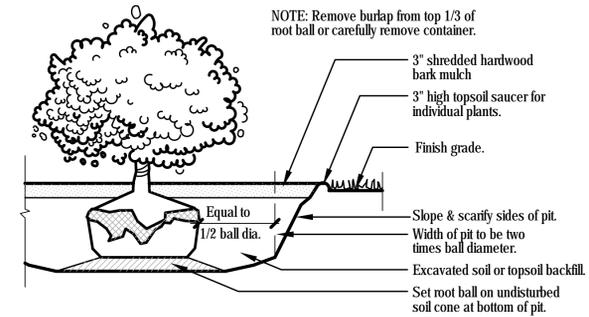

**SHRUB PLANTING**  
Not to Scale

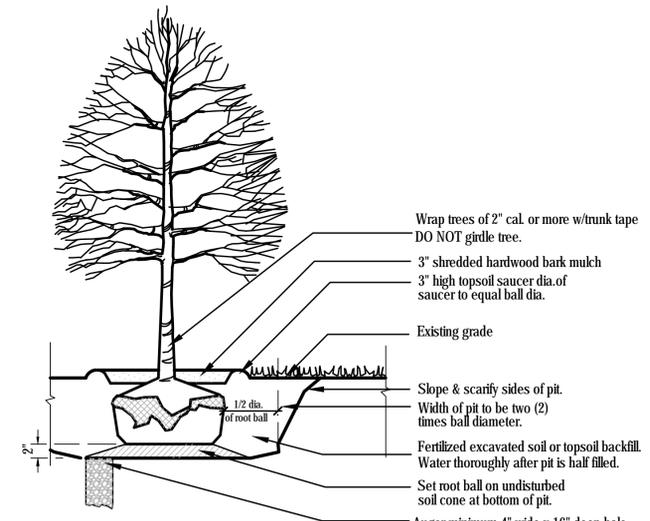

**TREE PLANTING**  
Not to Scale

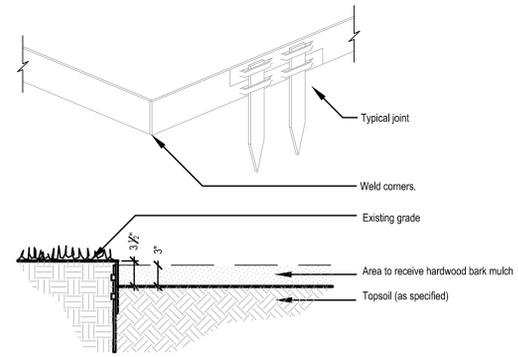

**STEEL EDGE**  
Not to Scale

**GRAND PARK INDOOR SPORTS ARENA**

WESTFIELD, IN



CERTIFIED BY

**ISSUANCE INDEX**

<b>DATE:</b>	07/16/2014
<b>PROJECT PHASE:</b>	DESIGN DEVELOPMENT

**REVISION SCHEDULE**

NO.	DESCRIPTION	DATE

Project Number 2014.01025

**LANDSCAPE DETAILS**

**L101**