

**GENERAL NOTES**

- IN CASE OF DISCREPANCIES BETWEEN THE PLAN AND THE PLANT LIST, THE PLAN SHALL DICTATE. IF IN QUESTION, CONTACT THE LANDSCAPE DESIGNER.
- ALL SHRUBS PLANTING AREAS TO BE COVERED WITH 3" THICK LAYER OF SHREDDED HARDWOOD BARK MULCH. ALL GROUND COVER BEDS SHALL BE COVERED WITH 1" SHREDDED HARDWOOD BARK MULCH. BARK MULCH SHALL BE APPROVED BY LANDSCAPE DESIGNER AND SHALL BE UNIFORM IN TEXTURE AND COLOR AND SHALL BE OBTAINED FROM SAWMILL OR LUMBERING OPERATIONS. NO UTILITY MULCH OR PROCESSED TREE TRIMMINGS WILL BE ALLOWED.
- AN APPROVED PRE-EMERGENT HERBICIDE SHALL BE APPLIED IN ALL PLANTING AND GROUND COVER BEDS AT RATES SPECIFIED BY MANUFACTURER FOR EACH VARIETY OF PLANT.
- FINAL PLACEMENT OF PLANT MATERIALS, ETC. SHALL BE APPROVED BY LANDSCAPE DESIGNER BEFORE PLANTING OPERATIONS ARE TO PROCEED. ALL TREE LOCATIONS SHALL BE MARKED WITH A WOODEN STAKE INDICATING VARIETY AND SIZE OF TREE. ALL GROUND COVER AND MULCH BED LINES SHALL BE MARKED BY A HIGHLY VISIBLE PAINT LINE WITH OCCASIONAL WOOD STAKES FOR REFERENCE. ALL STAKES SHALL BE REMOVED FOLLOWING PLANTINGS OPERATIONS. LANDSCAPE DESIGNER RESERVES THE RIGHT TO ADJUST PLANT LOCATIONS ON SITE.
- NO SUBSTITUTIONS OF PLANT MATERIALS WILL BE ALLOWED. IF PLANTS ARE SHOWN TO BE UNAVAILABLE, THE CONTRACTOR SHALL NOTIFY LANDSCAPE DESIGNER PRIOR TO BID DATE IN WRITING. ALL PLANTS SHALL BE INSPECTED AND TAGGED WITH PROJECT IDENTIFICATION AT NURSERY OR CONTRACTORS OPERATION PRIOR TO MOVING TO JOB SITE. PLANTS MAY ALSO BE INSPECTED AND APPROVED OR REJECTED ON THE JOB SITE.
- ALL PLANTS ARE TO MEET OR EXCEED AMERICAN STANDARDS FOR NURSERY STOCK, LATEST EDITION, AS SET FORTH BY AMERICAN ASSOCIATION OF NURSERMEN.
- PLANTS AND ALL OTHER MATERIALS TO BE STORED ON SITE WILL BE PLACED WHERE THEY WILL NOT CONFLICT WITH CONSTRUCTION OPERATIONS AND AS DIRECTED BY OWNER.
- THE LANDSCAPE CONTRACTOR SHALL OBTAIN AND PAY FOR ALL PERMITS AND FEES THAT MAY BE REQUIRED FOR HIS PORTION OF WORK.
- PEAT MOSS TO BE USED ON PROJECT SHALL BE A DOMESTIC OR NATURAL MATERIAL, CHOCOLATE BROWN IN COLOR AND COMPOSED OF PARTIALLY DECOMPOSED VEGETABLE MATERIAL. PEAT MOSS TO ALSO BE MILDLY ACIDIC IN CHARACTER AND SHALL MEET APPROVAL OF LANDSCAPE DESIGNER.
- LANDSCAPE CONTRACTOR SHALL NOTIFY LANDSCAPE DESIGNER IN WRITING PRIOR TO BID DATE OF ANY PLANTS THAT HE FEELS MAY NOT SURVIVE IN LOCATIONS NOTED.
- CONTRACTOR TO SUBMIT UNIT PRICES ON EVERY TYPE OF WORK AS REQUESTED BY LANDSCAPE DESIGNER.
- BACKFILL FOR SHRUB PLANTING SHALL BE 75% APPROVED TOPSOIL AND 25% APPROVED PEAT MOSS. TOP LAYER OF BACKFILL SHALL BE 100% EXISTING TOPSOIL. A 10-15 ANALYSIS, SLOW RELEASE FERTILIZER SHALL BE INCORPORATED INTO BACKFILL AT APPROVED RATES.
- PLANTS SHALL BE CERTIFIED BY THE STATE OF INDIANA DEPARTMENT OF NATURAL RESOURCES AND FREE FROM DISEASE OR HAZARDOUS INSECTS.
- IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY ALL EXISTING UTILITIES PERTAINING TO THEIR PHASE OF WORK. UTILITIES ARE SHOWN TO BE APPROXIMATE. CALL UTILITY LOCATE PRIOR TO ANY PLACEMENT OF PLANT MATERIAL OR OTHER LANDSCAPE MATERIAL.
- MASTER TREE LIST TO BE USED WHEN TREES ARE PLANTED WITHIN 20 FEET OF SWALES, STORM PIPES, OR POND TOP OF BANK.
- STREET TREES SHALL NOT BE WITHIN 4 FEET OF ANY PAVEMENT, SIDEWALKS OR TRAILS.
- THERE SHALL BE NO TREES WITHIN 10 FEET OF ANY STORM SEWER INCLUDING SSD.

**LANDSCAPE ORDINANCE REQUIREMENTS**

REQUIREMENT:	REQUIRED:	PROVIDED:
<b>SECTION 6.H: GENERAL SCREENING STANDARDS</b> - GROUND-MOUNTED HEATING AND COOLING UNITS MUST BE COMPLETELY SCREENED FROM ALL GROUND-LEVEL VIEWPOINTS - DUMPSTER ENCLOSURES - 6' HIGH SCREEN OF EVERGREEN TREES PLANTED 9' ON CENTER IN A DOUBLE STAGGERED ROW	- EVERGREEN TREES 9' ON CENTER AROUND TRASH ENCLOSURE	- EVERGREEN TREES 9' ON CENTER AROUND TRASH ENCLOSURE
<b>SECTION 6.K: LOT LANDSCAPING REQUIREMENTS</b> - 2 SHADE TREES, 3 ORNAMENTAL OR EVERGREEN TREES, AND 10 SHRUBS PER ACRE	<b>20 ACRES</b> - 40 SHADE TREES - 60 ORNAMENTAL OR EVERGREEN TREES - 200 SHRUBS	<b>20 ACRES</b> - 89 SHADE TREES - 54 ORNAMENTAL TREES - 18 EVERGREEN TREES - 788 SHRUBS
<b>SECTION 6.L: FOUNDATION PLANTINGS</b> - FRONT BUILDING FACADE - 1 SHRUB OR ORNAMENTAL TREE PER 12 LINEAL FEET - PLANTING BEDS MUST BE 8" WIDE AND PLACED WITHIN 15' OF THE BUILDING - UNBROKEN EXPANSIONS OF RELEASES OR FENCES BY OR LONGER - PLANT MATERIALS SPACED APPROXIMATELY EVERY 40' - MONUMENT SIGNS SHALL HAVE A LANDSCAPED AREA WITH A SIZE EQUIVALENT TO ONE SIDE OF THE MONUMENT SIGN'S FACE.	<b>WEST FACADE - 270'</b> - 23 SHRUBS OR ORNAMENTAL TREES <b>NORTH FACADE - 130'</b> - 11 SHRUBS OR ORNAMENTAL TREES	<b>WEST FACADE - 270'</b> - 23 SHRUBS <b>NORTH FACADE</b> - 11 SHRUBS
<b>SECTION 6.M: EXTERNAL STREET FRONTAGE</b> - MINIMUM LANDSCAPING AREA DEPTH OF 10' - 3 SHADE OR EVERGREEN TREES, 2 ORNAMENTAL TREES, AND 25 SHRUBS PER 100 LINEAL FEET. MAY BE CREDITED TOWARD PARKING AREA LANDSCAPING IF WITHIN 20'.	<b>151 ST - 537 LF</b> - 17 SHADE TREES - 11 ORNAMENTAL TREES - 135 SHRUBS <b>TOWNE RD - 1,200 LF</b> - 36 SHADE TREES - 24 ORNAMENTAL TREES - 300 SHRUBS	<b>151 ST</b> - 17 SHADE TREES - 11 ORNAMENTAL TREES - 135 SHRUBS <b>TOWNE RD</b> - 36 SHADE TREES - 24 ORNAMENTAL TREES - 300 SHRUBS
<b>SECTION 6.N: BUFFER YARD REQUIREMENTS</b> - 30' WIDTH - 3 SHADE TREES, 3 EVERGREEN TREES, AND 10 SHRUBS PER 100 LINEAL FEET	<b>EAST - 1,200 LF</b> - 36 SHADE TREES - 36 EVERGREEN TREES - 120 SHRUBS	- 17 SHADE TREES - 11 ORNAMENTAL TREES - 135 SHRUBS
<b>SECTION 6.O.1: INTERIOR PARKING AREA LANDSCAPING</b> - 10% OF PARKING AREA TO BE ISLANDS - 1 TREE AND 4 SHRUBS PER PARKING LOT ISLAND	<b>PARKING AREA - 88,983 SF</b> - 8,899 SF ISLANDS - 1 TREE AND 4 SHRUBS PER ISLAND	<b>PARKING AREA - 88,983 SF</b> - 10,366 SF ISLANDS - 1 TREE AND 4 SHRUBS PER ISLAND
<b>SECTION 6.O.2: PERIMETER PARKING AREA LANDSCAPING</b> - 5' WIDE MINIMUM - 1 TREE PER 30 LINEAL FEET - 1 SHRUB PER 3 LINEAL FEET - ONLY REQUIRED WHERE PARKING LOT IS WITHIN AN ESTABLISHED YARD OR WITHIN 20' OF A LOT LINE	<b>PARKING - 430 LF ALONG TOWNE RD</b> - 15 TREES - 144 SHRUBS	<b>PARKING</b> - 10 TREES FROM EXTERNAL STREET FRONTAGE - 5 TREES - 145 SHRUBS

**PLANT SCHEDULE**

PLANT KEY	BOTANICAL NAME	COMMON NAME	SIZE	QUANTITY	ROOT CONDITION	CENTER TO CENTER SPACING	SPECIAL INSTRUCTIONS	HEIGHT/WIDTH
<b>CANOPY DECIDUOUS TREES</b>								
A0	ACER RUBRUM 'OCTOBER GLORY'	OCTOBER GLORY RED MAPLE	2"	11	X	SEE PLAN	MIN 8'	50/40'
GIS	GLEDITSIA TRIACANTHOS 'SKYCOLE'	SKYLINE HONEYLOCUST	2"	17	X	SEE PLAN	MIN 8'	45/35'
LT	LIRIODENDRON TULIPIFERA	TULIP TREE	2"	12	X	SEE PLAN	MIN 8'	70/35'
NS	NYSSA SYLVATICA	BLACK GUM	2"	19	X	SEE PLAN	MIN 8'	50/30'
QA	QUERCUS ALBA	WHITE OAK	2"	24	X	SEE PLAN	MIN 8'	80/80'
TT	TILIA TOMENTOSA	SILVER LINDEN	2"	12	X	SEE PLAN	MIN 8'	70/50'
ZsG	ZELKOVA SERRATA 'GREEN VASE'	GREEN VASE ZELKOVA	2"	15	X	SEE PLAN	MIN 8'	60/50'
<b>EVERGREEN TREES</b>								
PA	PICEA ABIES	NORWAY SPRUCE	6"	14	X	SEE PLAN	X	50/30'
PO	PICEA OMORICA	SERBIAN SPRUCE	6"	10	X	SEE PLAN	X	60/25'
PpB	PICEA PUNGENS	COLORADO SPRUCE	6"	12	X	SEE PLAN	X	30/15'
<b>ORNAMENTAL UNDERSTORY TREES</b>								
AgF	ACER GINNALA 'FLAME'	AMUR MAPLE	2"	13	X	SEE PLAN	MULTI BRANCH	15/15'
AgA	AMELANCHIER X GRANDIFLORA 'AUTUMN BRILLIANCE'	AUTUMN BRILLIANCE SERVICEBERRY	2"	14	X	SEE PLAN	X	20/15'
CcG	CERCIS CANADENSIS	REDBUD	2"	5	X	SEE PLAN	X	25/30'
Cd	CRATAEGUS CRUS-GALLI VAR. INERMIS	THORNLESS COCKSPUR HAWTHORN	2"	5	X	SEE PLAN	THORNLESS	20/25'
MP	MALLUS 'PRAIRIE FIRE'	'PRAIRIE FIRE' CRABAPPLE	2"	11	X	SEE PLAN	X	20/20'
<b>DECIDUOUS SHRUBS</b>								
AaB	ARONIA ARBUTIFOLIA 'BRILLANTISSIMA'	RED CHOKEBERRY	#3	101	X	SEE PLAN	MIN 18"	7/4'
FL	FORSYTHIA X INTERMEDIA 'LYNWOOD GOLD'	LYNWOOD GOLD FORSYTHIA	#3	71	X	SEE PLAN	MIN 18"	8/8'
HV	HAMAMELIS VERNALIS	VERNAL WITCH-HAZEL	#3	67	X	SEE PLAN	MIN 18"	10/13'
HqR	HYDRANGEA QUERCIFOLIA 'RUBY SLIPPERS'	OAKLEAF HYDRANGEA	#3	54	X	SEE PLAN	MIN 18"	4/5'
PIG	POTENTILLA FRUTICOSA 'GOLDFINGER'	GOLDFINGER POTENTILLA	#3	74	X	SEE PLAN	MIN 18"	3/3'
SpM	SYRINGA PATULA 'MISS KIM'	MISS KIM LILAC	#3	54	X	SEE PLAN	MIN 18"	5/5'
<b>EVERGREEN SHRUBS</b>								
IgS	ILEX GLABRA 'SHAMROCK'	SHAMROCK INKBERRY	#3	43	X	SEE PLAN	MIN 18"	4/5'
ImC	ILEX X MESERVEAE 'CHINA TWINS'	CHINA TWINS HOLLY	#3	53	X	SEE PLAN	MIN 18"	10/8'
TmD	TAXUS X MEDIA 'DENSIFORMIS'	DENSE SPREADING YEW	#3	84	X	SEE PLAN	MIN 18"	3/6'
TH	TAXUS X MEDIA 'WARDI'	SPREADING YEW	#3	91	X	SEE PLAN	MIN 18"	3/8'
ToH	THUJA OCCIDENTALIS 'HOLMSTRUP'	HOLMSTRUP ARBORVITAE	#3	60	X	SEE PLAN	MIN 18"	15/5'
ToL	THUJA OCCIDENTALIS 'LITTLE GIANT'	LITTLE GIANT ARBORVITAE	#3	80	X	SEE PLAN	MIN 18"	4/4'


**LEGEND**



**LANDSCAPE PLAN NOTES**

- SEED OR SOD (ALTERNATE)- ALL SOD SHALL BE CERTIFIED GRASS CULTIVATED GRASS SOD. OF 'ADVENTURE BLEND' TURF TYPE TALL FESCUE (BY GENERAL CONTRACTOR). REFER TO CHART OF L200 FOR SEED MIX & COORDINATE WITH OWNER
- LANDSCAPE BED EDGE (TYP.)
- MULCH

**-NOTE-**  
ANY EXISTING TREE(S) THAT MAY REQUIRE REMOVAL ARE NOT SHOWN ON THE PLAN AS BEING REMOVED MAY BE DONE SO, AS LONG AS THE TREE(S) ARE RELOCATED TO AN APPROVED ALTERNATIVE LOCATION ON SITE.



LOCATION: W15.0043 Engineering\Design\Comm\W150043-L100.dwg  
DATE/PLT: February 11, 2016 - 2:08pm  
PLOT/DWG: Thermal

10505 N. College Avenue  
Indianapolis, Indiana 46280  
weihe.net  
317 846-6611  
800 452-6408  
317 843-0546 fax  
ALLAN R. WEIHE, P.E., L.S., FOUNDER

**WEIHE ENGINEERS**  
Land Surveying | Civil Engineering  
Landscape Architecture

DATE: 02-09-2016  
BY: JMS  
PROJECT NO.: W15.0043  
DWG NAME: W150043-00  
DISCIPLINE: LANDSCAPE  
DRAWN BY: JMS  
CHECKED BY: JMS  
DATE: 02-09-2016


REVISIONS AND ISSUES  
SUBMITTED FOR INITIAL REVIEW  
REVISION FOR REVIEW COMMENTS

APPROVAL PENDING  
NOT FOR CONSTRUCTION

PREPARED FOR:  
**CENTRAL CHRISTIAN CHURCH**  
151st STREET & TOWNE ROAD, WESTFIELD, IN  
**LANDSCAPE PLAN**  
Part of SWM, Section 16, Township 18 North, Range 08 East, Washington Township, Hamilton County, Indiana

SHEET NO.  
**L100**  
PROJECT NO.  
W15.0043

**811**  
Know what's below.  
Call before you dig.  
Within Indiana Call  
811 or 800-332-5544  
24 Hours a Day, 7 Days a Week.  
PER INDIANA STATE LAW IC 8-1-26,  
IT IS AGAINST THE LAW TO EXCAVATE  
WITHOUT NOTIFYING THE UNDERGROUND  
LOCATION SERVICE TWO (2) WORKING  
DAYS BEFORE COMMENCING WORK.

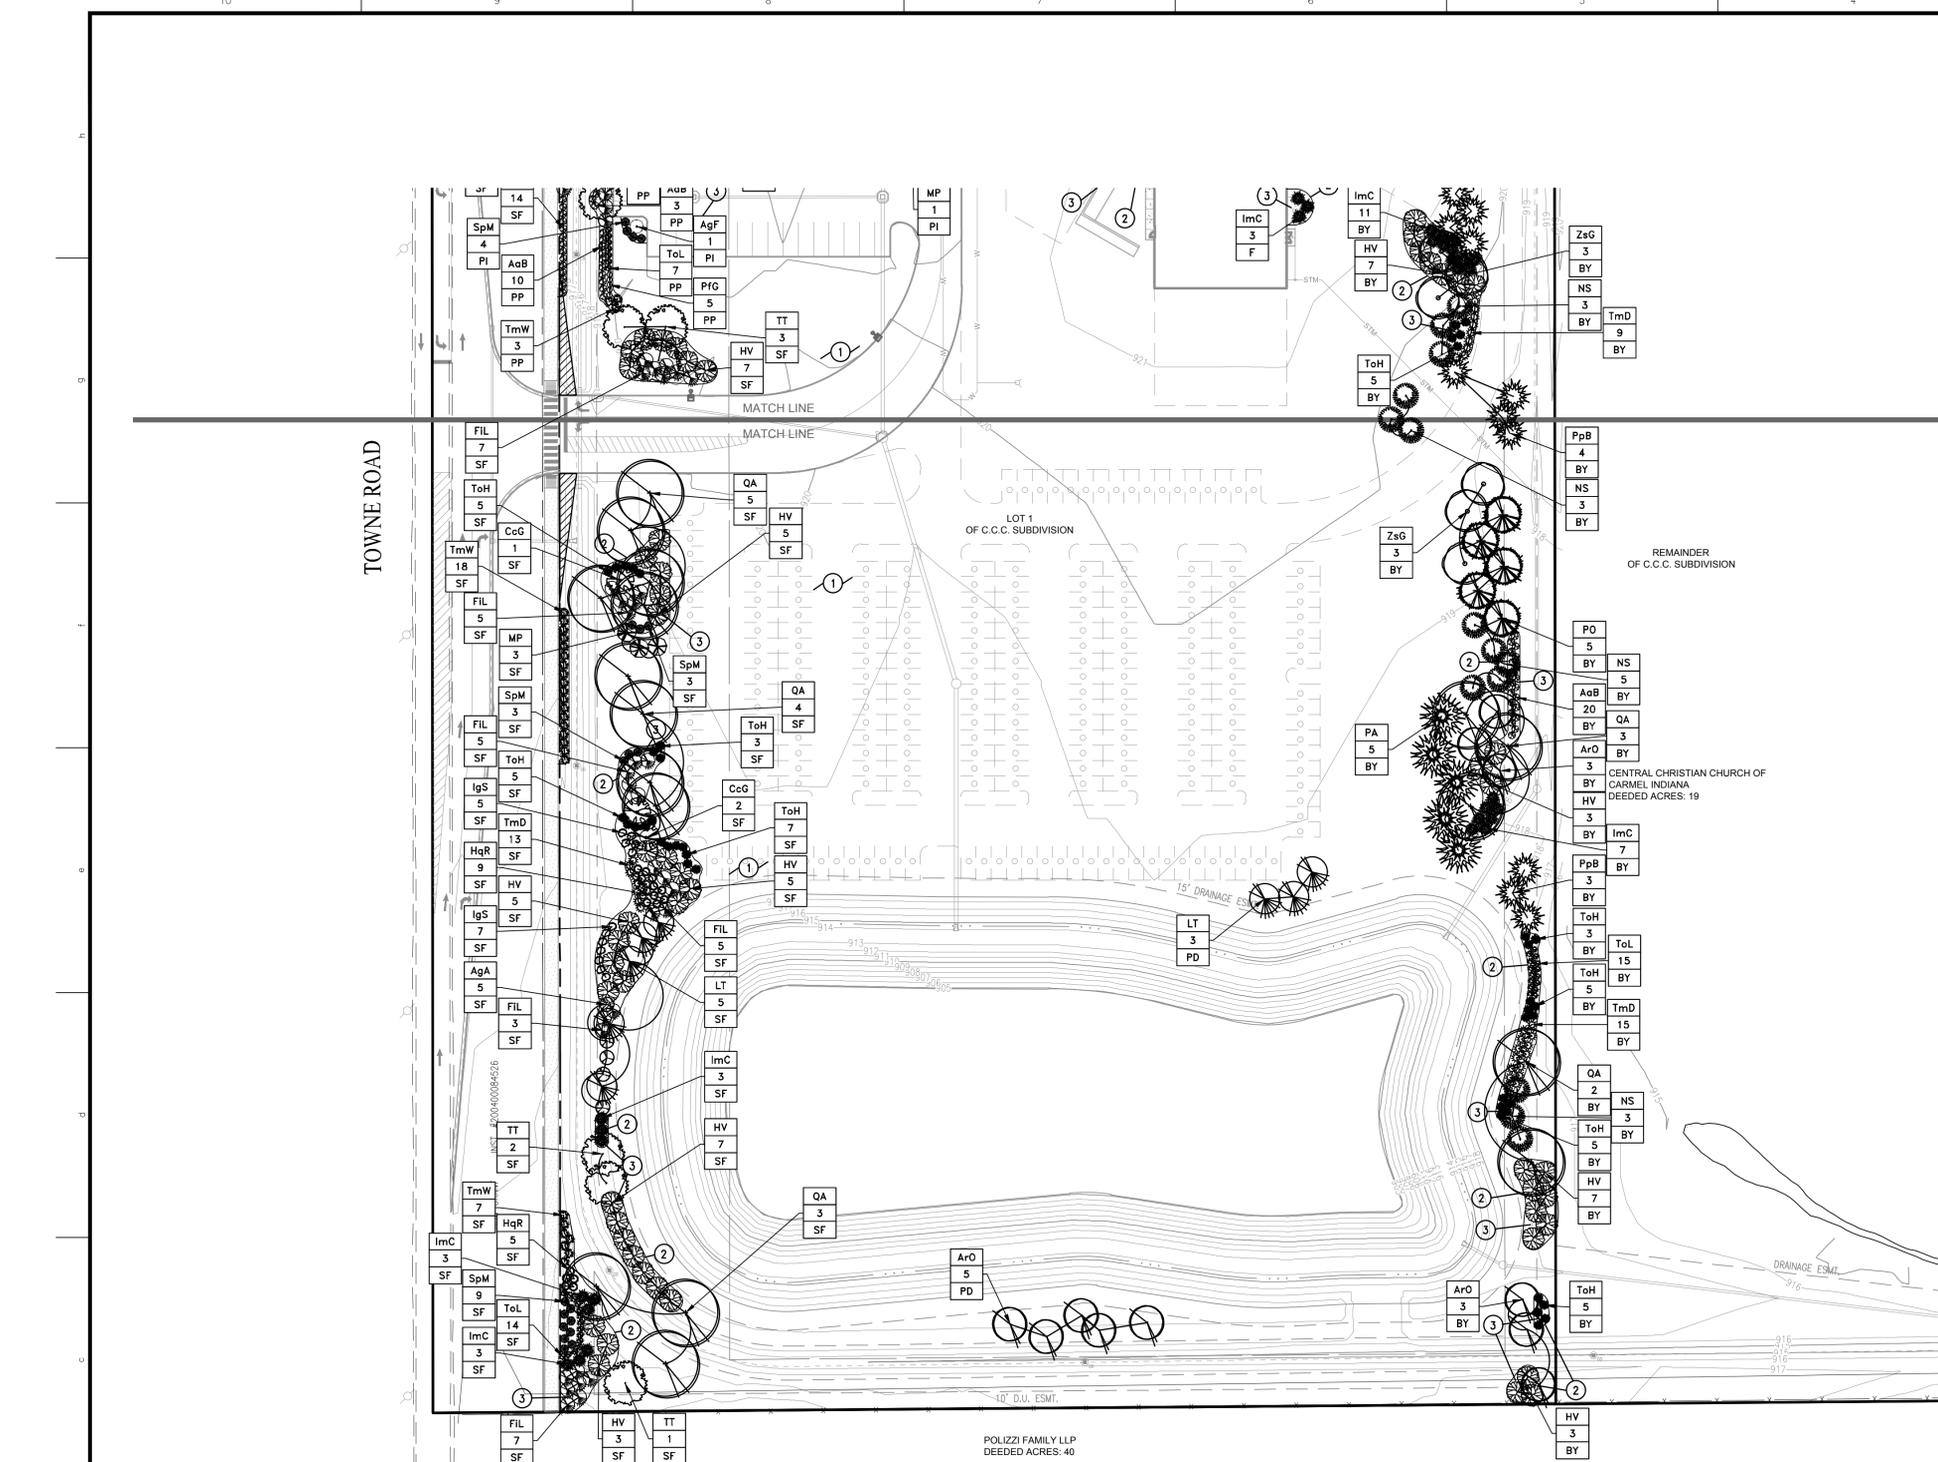

**GENERAL NOTES**

- IN CASE OF DISCREPANCIES BETWEEN THE PLAN AND THE PLANT LIST, THE PLAN SHALL DICTATE. IF IN QUESTION, CONTACT THE LANDSCAPE DESIGNER.
- ALL SHRUBS PLANTING AREAS TO BE COVERED WITH 3" THICK LAYER OF SHREDDED HARDWOOD BARK MULCH. ALL GROUND COVER BEDS SHALL BE COVERED WITH 1" SHREDDED HARDWOOD BARK MULCH. BARK MULCH SHALL BE APPROVED BY LANDSCAPE DESIGNER AND SHALL BE UNIFORM IN TEXTURE AND COLOR AND SHALL BE OBTAINED FROM SAWMILL OR LUMBERING OPERATIONS. NO UTILITY MULCH OR PROCESSED TREE TRIMMINGS WILL BE ALLOWED.
- AN APPROVED PRE-EMERGENT HERBICIDE SHALL BE APPLIED IN ALL PLANTING AND GROUND COVER BEDS AT RATES SPECIFIED BY MANUFACTURER FOR EACH VARIETY OF PLANT.
- FINAL PLACEMENT OF PLANT MATERIALS, ETC. SHALL BE APPROVED BY LANDSCAPE DESIGNER BEFORE PLANTING OPERATIONS ARE TO PROCEED. ALL TREE LOCATIONS SHALL BE MARKED WITH A WOODEN STAKE INDICATING VARIETY AND SIZE OF TREE. ALL GROUND COVER AND MULCH BED LINES SHALL BE MARKED BY A HIGHLY VISIBLE PAINT LINE WITH OCCASIONAL WOOD STAKES FOR REFERENCE. ALL STAKES SHALL BE REMOVED FOLLOWING PLANTING OPERATIONS. LANDSCAPE DESIGNER RESERVES THE RIGHT TO ADJUST PLANT LOCATIONS ON SITE.
- NO SUBSTITUTIONS OF PLANT MATERIAL WILL BE ALLOWED. IF PLANTS ARE SHOWN TO BE UNAVAILABLE, THE CONTRACTOR SHALL NOTIFY LANDSCAPE DESIGNER PRIOR TO BID DATE IN WRITING. ALL PLANTS SHALL BE INSPECTED AND TAGGED WITH PROJECT IDENTIFICATION AT NURSERY OR CONTRACTORS OPERATION PRIOR TO MOVING TO JOB SITE. PLANTS MAY ALSO BE INSPECTED AND APPROVED OR REJECTED ON THE JOB SITE.
- ALL PLANTS ARE TO MEET OR EXCEED AMERICAN STANDARDS FOR NURSERY STOCK, LATEST EDITION, AS SET FORTH BY AMERICAN ASSOCIATION OF NURSERYMEN.
- PLANTS AND ALL OTHER MATERIALS TO BE STORED ON SITE WILL BE PLACED WHERE THEY WILL NOT CONFLICT WITH CONSTRUCTION OPERATIONS AND AS DIRECTED BY OWNER.
- THE LANDSCAPE CONTRACTOR SHALL OBTAIN AND PAY FOR ALL PERMITS AND FEES THAT MAY BE REQUIRED FOR HIS PORTION OF WORK.
- PEAT MOSS TO BE USED ON PROJECT SHALL BE A DOMESTIC OR IMPORTED MATERIAL, CHOCOLATE BROWN IN COLOR AND COMPOSED OF PARTIALLY DECOMPOSED VEGETABLE MATERIAL. PEAT MOSS TO ALSO BE MILDLY ACIDIC IN CHARACTER AND SHALL MEET APPROVAL OF LANDSCAPE DESIGNER.
- LANDSCAPE CONTRACTOR SHALL NOTIFY LANDSCAPE DESIGNER IN WRITING PRIOR TO BID DATE OF ANY PLANTS THAT HE FEELS MAY NOT SURVIVE IN LOCATIONS NOTED.
- CONTRACTOR TO SUBMIT UNIT PRICES ON EVERY TYPE OF WORK AS REQUESTED BY LANDSCAPE DESIGNER.
- BACKFILL FOR SHRUB PLANTING SHALL BE 75% APPROVED TOPSOIL AND 25% APPROVED PEAT MOSS. TOP LAYER OF BACKFILL SHALL BE 100% EXISTING TOPSOIL. A 5-10-5 ANALYSIS SLOW RELEASE FERTILIZER SHALL BE INCORPORATED INTO BACKFILL AT APPROVED RATES.
- PLANTS SHALL BE CERTIFIED BY THE STATE OF INDIANA DEPARTMENT OF NATURAL RESOURCES AND FREE FROM DISEASE OR HAZARDOUS INSECTS.
- IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY ALL EXISTING UTILITIES PERTAINING TO THEIR PHASE OF WORK. UTILITIES ARE SHOWN TO BE APPROXIMATE. CALL UTILITY LOCATE PRIOR TO ANY PLACEMENT OF PLANT MATERIAL OR OTHER LANDSCAPE MATERIAL.
- MASTER TREE LIST TO BE USED WHEN TREES ARE PLANTED WITHIN 20 FEET OF SWALES, STORM PIPES, OR POND TOP OF BANK.
- STREET TREES SHALL NOT BE WITHIN 4 FEET OF ANY PAVEMENT, SIDEWALKS OR TRAILS.
- THERE SHALL BE NO TREES WITHIN 10 FEET OF ANY STORM SEWER INCLUDING SSD.

PLANT KEY	BOTANICAL NAME	COMMON NAME	SIZE	QUANTITY	ROOT BALL & BARRE	CONDITION	CENTER SPACING	SPECIAL INSTRUCTIONS	HEIGHT	WIDTH
<b>DECIDUOUS TREES</b>										
ArO	ACER RUBRUM 'OCTOBER GLORY'	OCTOBER GLORY RED MAPLE	2"	11	X		SEE PLAN	MIN 8'	50'	40'
GIS	GLEDTISIA TRIACANTHOS 'SKYCOLE'	SKYLINE HONEYLOCUST	2"	17	X		SEE PLAN	MIN 8'	45'	35'
LT	LIRIODENDRON TULIPIFERA	TULIP TREE	2"	12	X		SEE PLAN	MIN 8'	70'	35'
NS	NYSSA SYLVATICA	BLACK GUM	2"	19	X		SEE PLAN	MIN 8'	50'	30'
QA	QUERCUS ALBA	WHITE OAK	2"	24	X		SEE PLAN	MIN 8'	80'	80'
TT	TILIA TOMENTOSA	SILVER LINDEN	2"	12	X		SEE PLAN	MIN 8'	70'	50'
ZsG	ZELKOVA SERRATA 'GREEN VASE'	GREEN VASE ZELKOVA	2"	15	X		SEE PLAN	MIN 8'	60'	50'
<b>EVERGREEN TREES</b>										
PA	PICEA ABIES	NORWAY SPRUCE	6"	14	X		SEE PLAN	X	50'	30'
PO	PICEA OMORICA	SERBIAN SPRUCE	6"	10	X		SEE PLAN	X	60'	25'
PpB	PICEA PUNGENS	COLORADO SPRUCE	6"	12	X		SEE PLAN	X	30'	15'
<b>ORNAMENTAL UNDERSTORY TREES</b>										
AgF	ACER GINNALA 'FLAME'	AMUR MAPLE	2"	13	X		SEE PLAN	MULTI BRANCH	15'	15'
AgA	AMELANCHIER X GRANDIFLORA 'AUTUMN BRILLIANCE'	AUTUMN BRILLIANCE SERVICEBERRY	2"	14	X		SEE PLAN	X	20'	15'
CcG	CERCIS CANADENSIS	REDBUD	2"	5	X		SEE PLAN	X	25'	30'
Ccl	CRATAEGUS CRUS-GALLI VAR. INERMIS	THORNLESS COCKSPUR HAWTHORN	2"	5	X		SEE PLAN	THORNLESS	20'	25'
MP	MALUS 'PRAIRIE FIRE'	'PRAIRIE FIRE' CRABAPPLE	2"	11	X		SEE PLAN	X	20'	20'
<b>DECIDUOUS SHRUBS</b>										
ArB	ARONIA ARBUTIFOLIA 'BRILLIANTISSIMA'	RED CHOKEBERRY	#3	101		X	SEE PLAN	MIN 18"	7'	4'
FIL	FORSYTHIA X INTERMEDIA 'LYNWOOD GOLD'	LYNWOOD GOLD FORSYTHIA	#3	71		X	SEE PLAN	MIN 18"	8'	8'
HV	HAMAMELIS VERNALIS	VERNAL WITCHHAZEL	#3	67		X	SEE PLAN	MIN 18"	10'	13'
HqR	HYDRANGEA QUERCIFOLIA 'RUBY SLIPPERS'	OAKLEAF HYDRANGEA	#3	54		X	SEE PLAN	MIN 18"	4'	5'
PIG	POTENTILLA FRUTICOSA 'GOLDFINGER'	GOLDFINGER POTENTILLA	#3	74		X	SEE PLAN	MIN 18"	3'	3'
SpM	SYRINGA PATULA 'MISS KIM'	MISS KIM LILAC	#3	54		X	SEE PLAN	MIN 18"	5'	5'
<b>EVERGREEN SHRUBS</b>										
IgS	ILEX GLABRA 'SHAMROCK'	SHAMROCK INKBERRY	#3	43	X		SEE PLAN	MIN 18"	4'	5'
ImC	ILEX X MESSERVAE 'CHINA TWINS'	CHINA TWINS HOLLY	#3	53	X		SEE PLAN	MIN 18"	10'	8'
TmD	TAXUS X MEDIA 'DENSIFORMIS'	DENSE SPREADING YEW	#3	84	X		SEE PLAN	MIN 18"	3'	6'
TmW	TAXUS X MEDIA 'WARDII'	SPREADING YEW	#3	91	X		SEE PLAN	MIN 18"	3'	6'
ToH	THUJA OCCIDENTALIS 'HOLMSTRUP'	HOLMSTRUP ARBORVITAE	#3	60	X		SEE PLAN	MIN 18"	15'	5'
ToL	THUJA OCCIDENTALIS 'LITTLE GIANT'	LITTLE GIANT ARBORVITAE	#3	80	X		SEE PLAN	MIN 18"	4'	4'

**LANDSCAPE PLAN NOTES**


- SOD (ALTERNATE)-ALL SOD SHALL BE CERTIFIED GRADE CULTIVATED GRASS SOD OF "ADVENTURE BLEND" TURF-TYPE TALL FESCUE (BY GENERAL CONTRACTOR)
- LANDSCAPE BED EDGE (TYP.)
- MULCH

**LEGEND**



**-NOTE-**  
ANY EXISTING TREE(S) THAT MAY REQUIRE REMOVAL BUT ARE NOT SHOWN ON THE PLAN AND BEING REMOVED MAY BE DONE SO, AS LONG AS THE TREE(S) ARE RELOCATED TO AN APPROVED ALTERNATIVE LOCATION ON SITE.

SYMBOL	QUANTITY	PLANTING AREA
GIS	1	F = FOUNDATION PLANTINGS
P1		SF = STREET FRONTAGE
		BY = BUFFER YARD
		PI = INTERIOR PARKING LOT
		PP = PERIMETER PARKING LOT
		D = DUMPSTER SCREENING
		PD = POND PLANTINGS



**811**  
Know what's below.  
Call before you dig.  
Within Indiana Call  
811 or 800-332-5544  
24 Hours a Day, 7 Days a Week.  
PER INDIANA STATE LAW IC 8-1-26,  
IT IS AGAINST THE LAW TO EXCAVATE  
WITHOUT NOTIFYING THE UNDERGROUND  
LOCATION SERVICE TWO (2) WORKING  
DAYS BEFORE COMMENCING WORK.

10505 N. College Avenue  
Indianapolis, Indiana 46280  
weihe.net  
317 | 846 - 6611  
800 | 452 - 6408  
317 | 843 - 0546 fax  
ALLAN E. WEIHE, P.E., L.S. - FOUNDER

**WEIHE ENGINEERS**  
Land Surveying | Civil Engineering  
Landscape Architecture

PROJECT NO.: W15.0043  
DATE: 10-30-2016  
DESIGNED BY: RLW  
DRAWN BY: RLW  
CHECKED BY: JKS  
DATE: 02-09-2016

REVISIONS AND ISSUES:  
SUBMITTED FOR INITIAL REVIEW  
REVISED FOR REVIEW COMMENTS

APPROVAL PENDING  
NOT FOR CONSTRUCTION

PREPARED FOR:  
**CENTRAL CHRISTIAN CHURCH**  
151st STREET & TOWNE ROAD, WESTFIELD, IN  
**LANDSCAPE PLAN**  
Part of SWM, Section 16, Township 16 North, Range 03 East, Washington Township, Hamilton County, Indiana

SHEET NO.  
**L101**  
PROJECT NO.  
W15.0043

LOCATION: H:\2015\W150043\Engineering\Design\Concept\W150043-L100.dwg  
DATE/TIME: February 09, 2016 2:12pm  
PLOTTED BY: webster



