



S831 Keystone Crossing, Indianapolis, IN 46240 317.848.7800 | csoinc.net

WESTFIELD WASHINGTON SCHOOLS
TENNIS FACILITY
100% CONSTRUCTION
DOCUMENTS
17695 SHAMROCK BLVD., WESTFIELD, INDIANA 46074

SCOPE DRAWINGS:

These drawings indicate the general scope of the project in terms of architectural design concept, the dimensions of the building, the major architectural elements and the type of structural, mechanical and electrical systems.


The drawings do not necessarily indicate or describe all work required for full performance and completion of the requirements of the Contract.

On the basis of the general scope indicated or described, the trade contractors shall furnish all items required for the proper execution and completion of the work.

REVISIONS:


ISSUE DATE DRAWN BY CHECKED BY 09/29/2023 Author Checker

EXTERIOR
ELEVATIONS
AND WALL
SECTIONS



DRAWING NUMBER
A102

PROJECT NUMBER 2023029

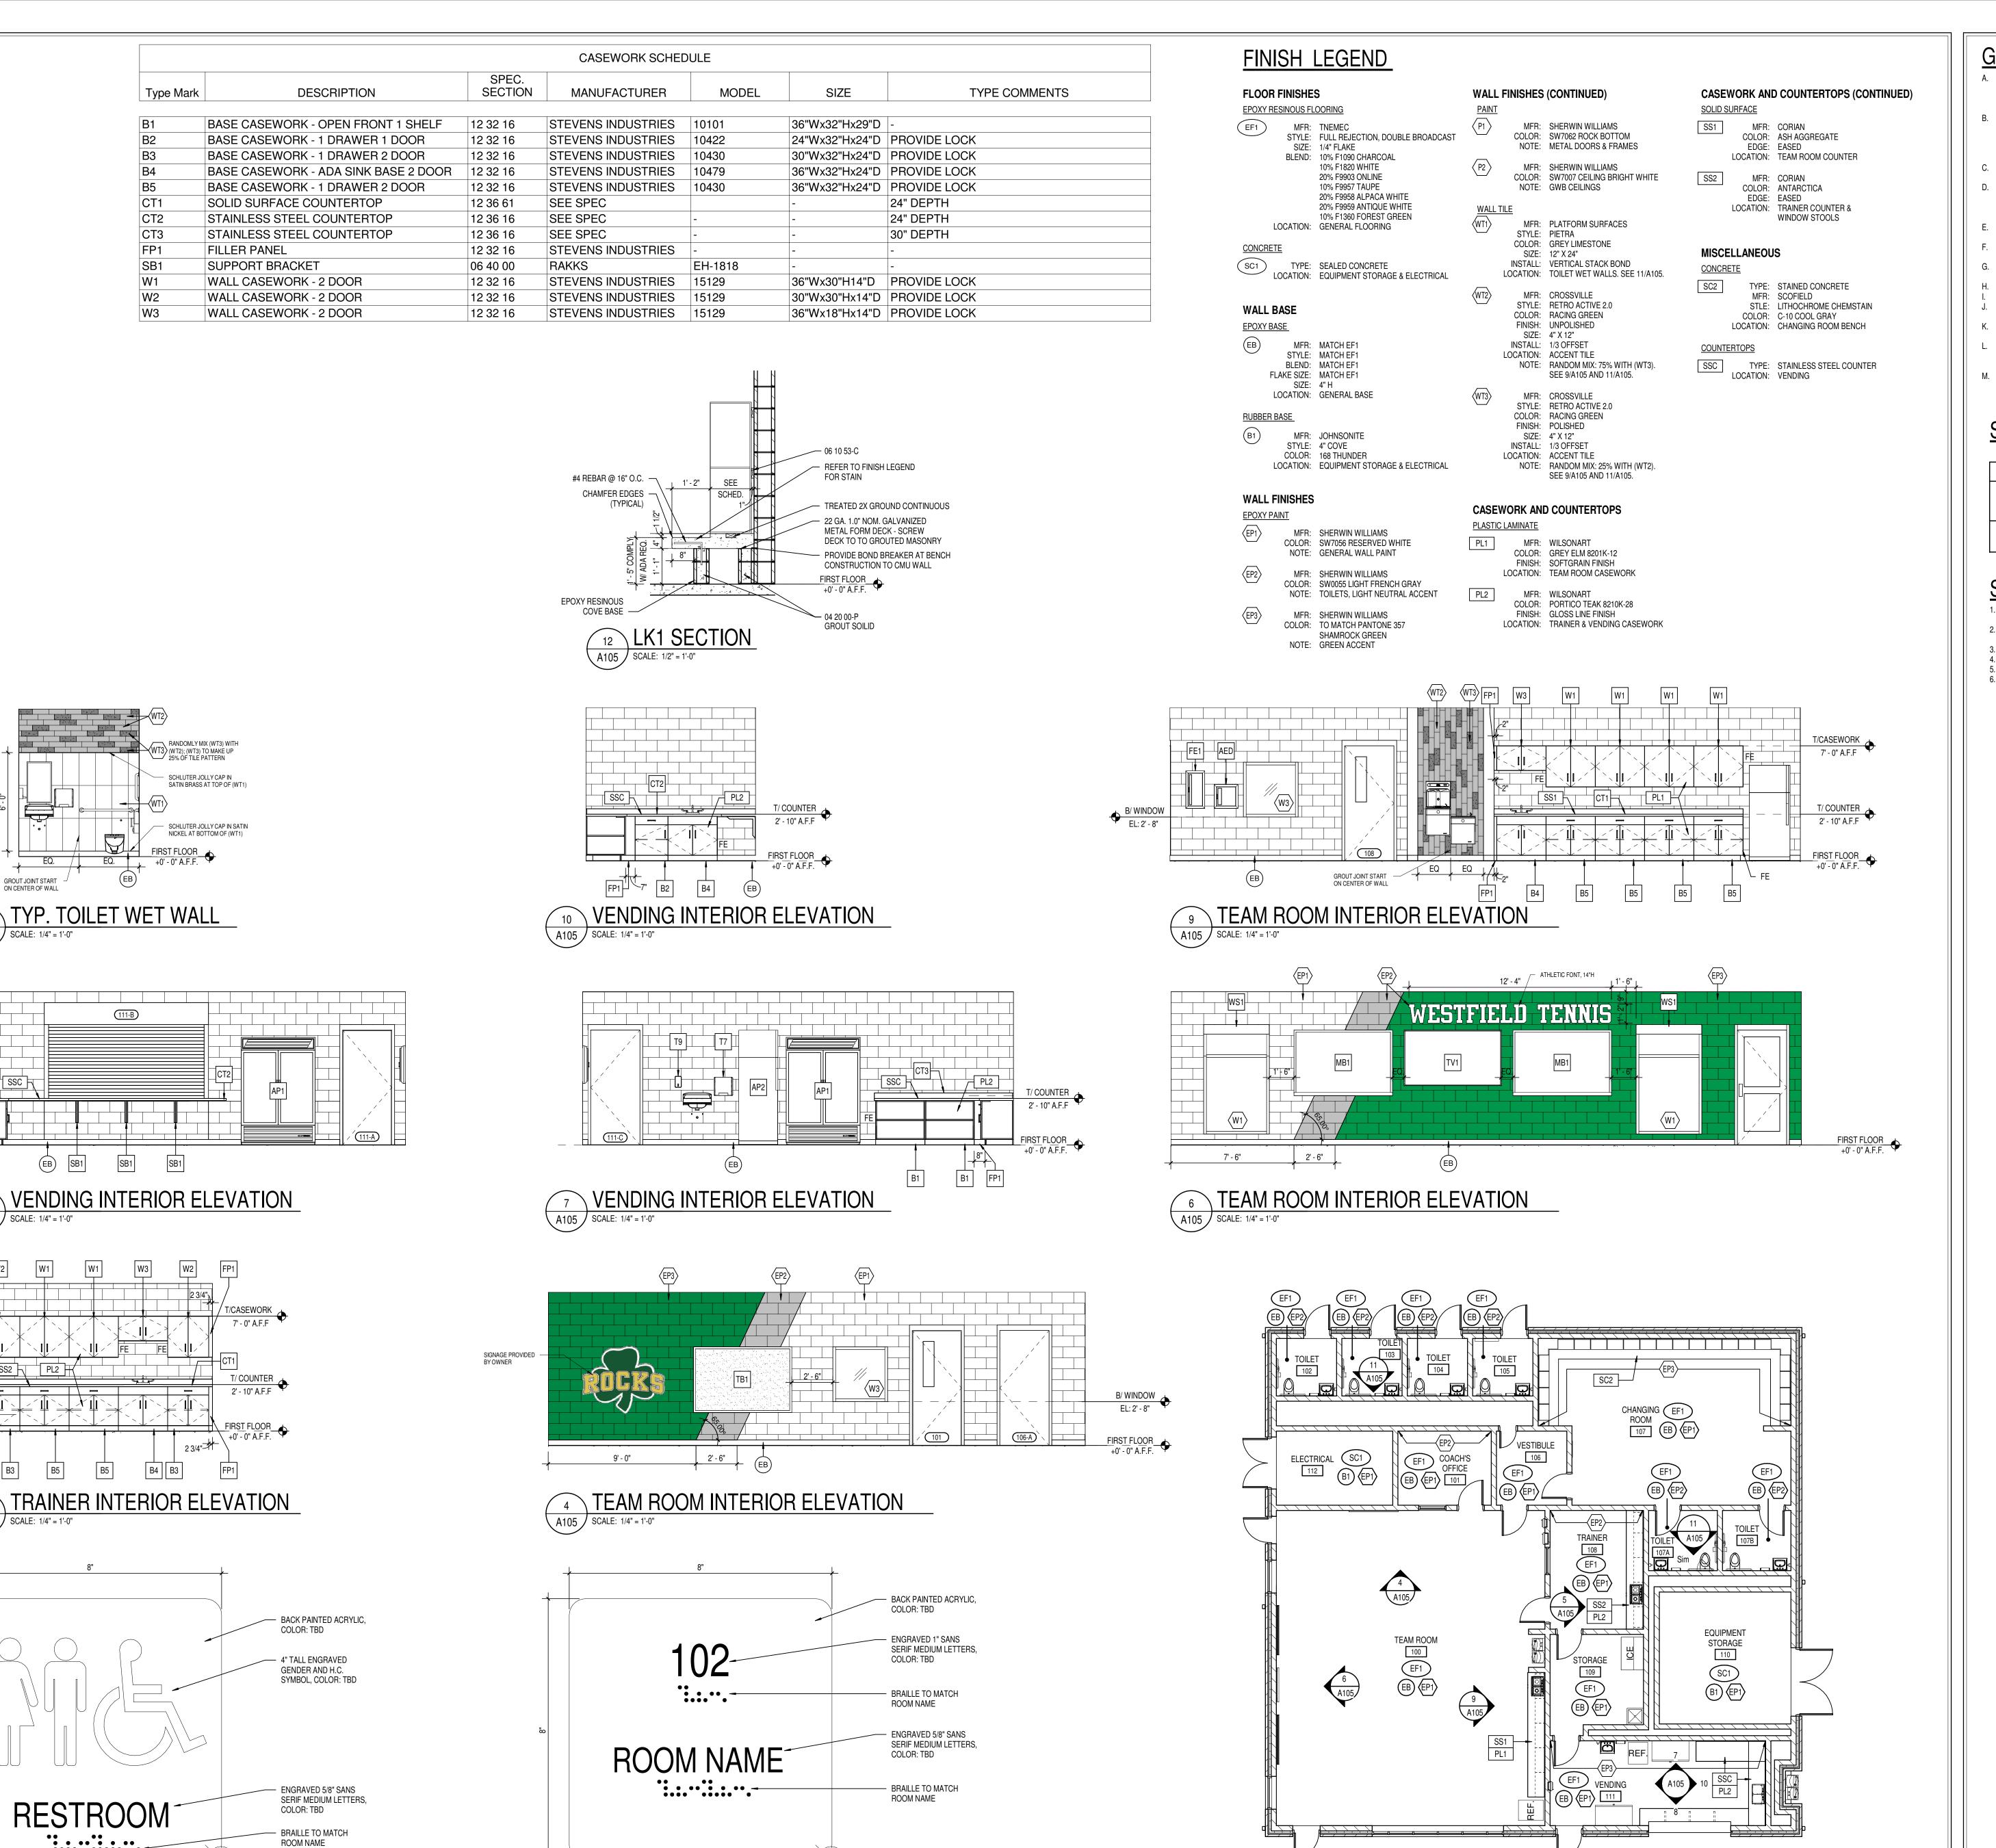

FIRST FLOOR FINISH PLAN

2 TYPE "A"
A105 SCALE: 6" = 1'-0"

A105 | SCALE: 1/4" = 1'-0"

A105 SCALE: 1/4" = 1'-0"

A105 SCALE: 1/4" = 1'-0"

3 TYPE "B"

T/ COUNTER 2' - 10" A.F.F

GENERAL FINISH NOTES

- A. ANY DISCREPANCIES WITHIN THE DOCUMENTS SHOULD BE BROUGHT TO THE ATTENTION OF CSO ARCHITECTS PRIOR TO INSTALLATION. THESE DOCUMENTS WILL GOVERN OVER PREVIOUS SUPPLEMENTAL DRAWINGS. THE SCHEDULED MATERIALS SHALL NOT BE INSTALLED BEFORE THE CONTRACTORS ACTUAL COLOR SUBMITTALS HAVE BEEN APPROVED,
- AS CALLED FOR IN THE SPECIFICATIONS. IF ANY MATERIAL IS INSTALLED BEFORE APPROVAL, THE CONTRACTOR WILL BE RESPONSIBLE FOR ALL ERRONEOUS SPECIFICATIONS.
- ALL SURFACES RECEIVING FINISHES SHALL BE PROPERLY PREPARED PER MANUFACTURERS' SPECIFICATIONS PRIOR TO INSTALLATION. FOR CHANGE IN FLOOR FINISH MATERIAL, PROVIDE TRANSITION STRIP AT DOOR UNO. G.C. IS TO SUBMIT COLOR SAMPLES OF
- RUBBER TRANSITION STRIPS TO ARCHITECT/DESIGNER FOR APPROVAL AND SELECTION OF COLOR. WHEN FLOOR FINISHES TRANSITION AT DOOR OPENING THE TRANSITION IS TO BE ON CENTER OF THE DOOR U.N.O.
- SEE INTERIOR PAINT SPECIFICATIONS FOR SCHEDULE OF COATING TYPE PER SUBSTRATE.
- G. PAINT WALLS BEFORE INSTALLING MARKER BOARDS, TACKBOARDS, H. ALL HOLLOW METALS DOORS & FRAMES ARE TO BE PAINTED (P1).
- ALL WINDOW STOOLS ARE TO BE (SS2). WHERE TILE TO TILE TRANSITIONS OCCUR, TRIM (WT1) WITH
- SCHLUTER JOLLY IN SATIN BRASS. SEE ELEVATION 11/A105. K. WHERE TILE TO EPOXY BASE TRANSITIONS OCCUR, TRIM (WT1) WITH SCHLUTER JOLLY IN SATIN NICKEL. SEE ELEVATION 11/A105. ALL GWB CEILINGS AND/OR BULKHEADS TO HAVE FACES PAINTED TO
- MATCH ADJACENT WALLS, AND UNDERSIDE TO BE PAINTED (P2), M. WALL TILE TO BE INSTALLED WITH THE RECOMMENDED GROUT THICKNESS PER TILE MANUFACTURER.

SIGNAGE LOCATION SCHEDULE

			SIGN TYPE	LOCATIONS
			А	TEAM ROOM 100, COACH'S OFFICE 101, VESTIBULE 106, CHANGING ROOM 107, TRAINER 108, STORAGE 109, EQUIPMENT STORAGE 110, VENDING 111, ELECTRICAL 112
			В	TOILET 102, TOILET 103, TOILET 104, TOILET 105, TOILET 107A, TOILET 107B

SIGNAGE GENERAL NOTES

- 1. CONTRACTOR SHALL VERIFY ALL SIGN TYPES ARE COMPLIANT WITH ALL APPLICABLE ACCESSIBLE REQUIREMENTS PRIOR TO FABRICATION. CONTRACTOR SHALL SUBMIT SIGNAGE SCHEDULE TO ARCHITECT FOR APPROVAL PRIOR TO FABRICATION.
- REFERENCE A001 FOR TYP. MOUNTING HEIGHTS COLORS SHALL BE SELECTED BY ARCHITECT.
- SIDES OF SIGN SHALL BE PAINTED TO MATCH SIGN FACE PROVIDE (1) SIGN ON THE PUBLIC SIDE OF EVERY DOOR OF EVERY ROOM.


TENNIS FACILITY
100% CONSTRUCT
DOCUMENTS **FIELD WA**

SCOPE DRAWINGS:

REVISIONS:

ISSUE DATE | DRAWN BY | CHECKED B' Author Checker

> DRAWING TITLE: FINISH PLAN, SIGNAGE & **INTERIOR ELEVATIONS**



DRAWING NUMBER A105

PROJECT NUMBER 2023029